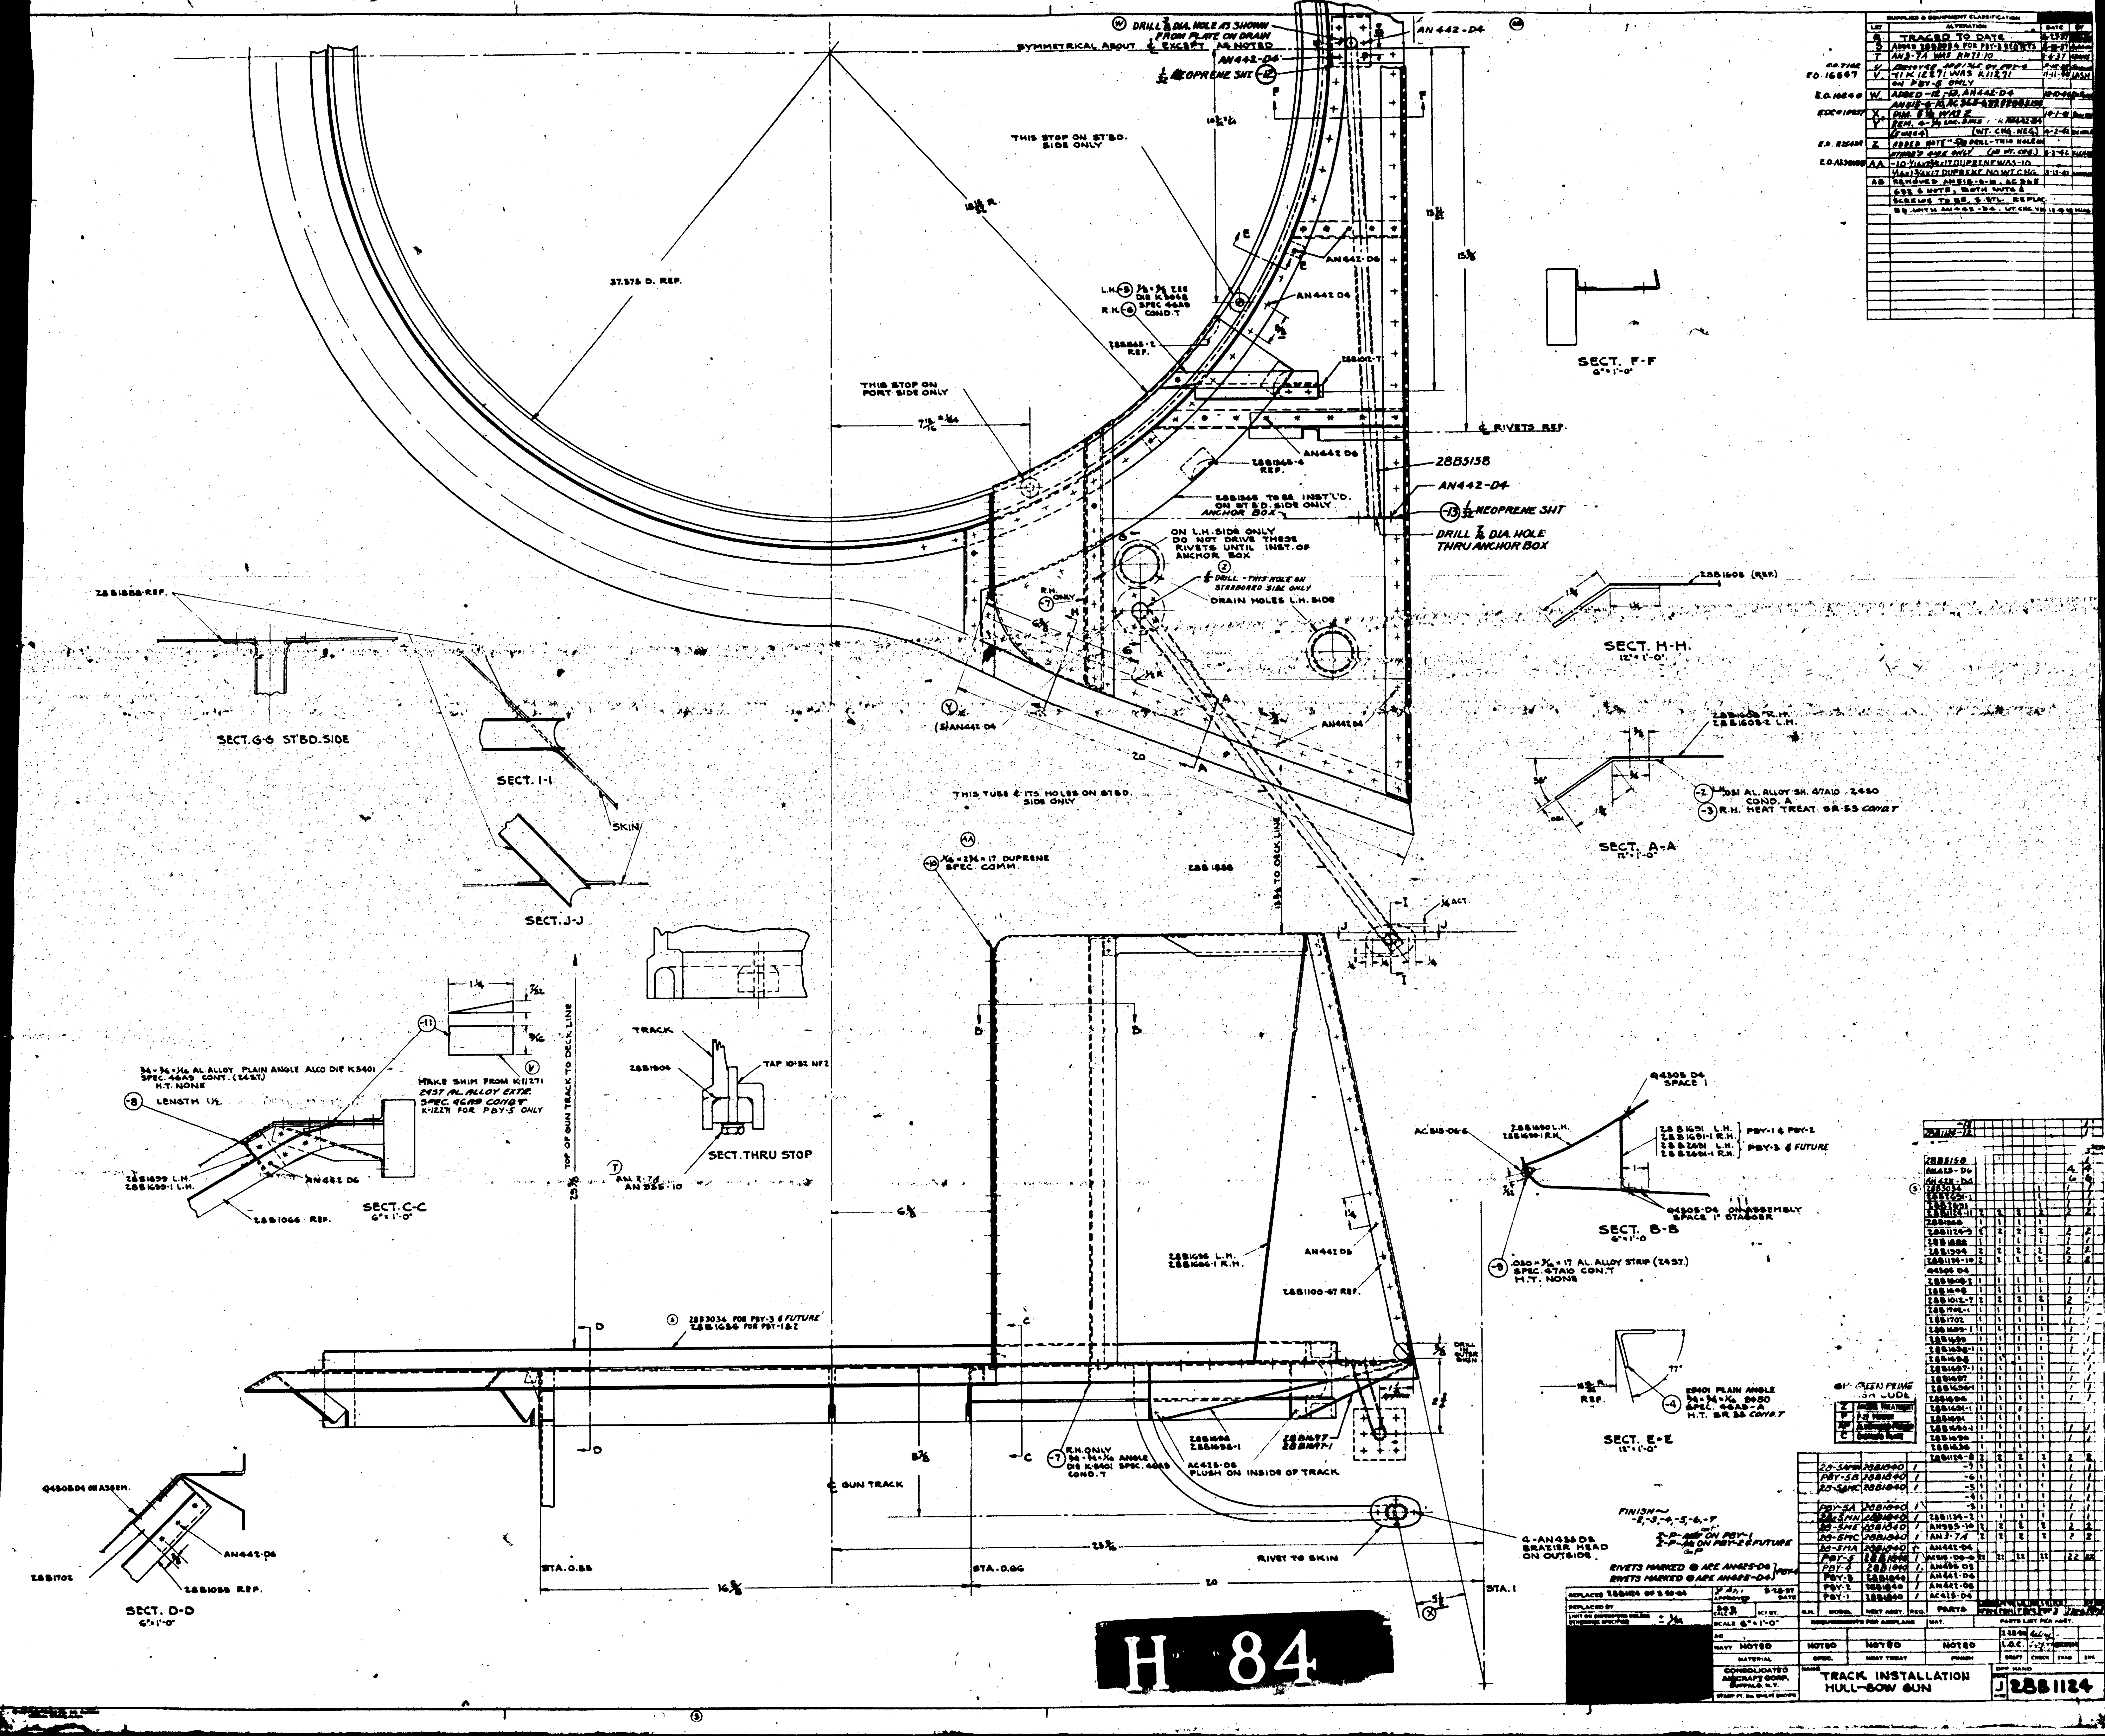


TRACK INSTALLATION
HULL-BOW GUN
J 28B1124
CONSOLIDATED AIRCRAFT CORP.
BUFFALO, N.Y.
SCALE 6" = 1'-0"
NAVY NOTED
NOTED
NOTED
NOTED
MATERIAL
HEAT TREAT
FINISH
OPP HAND
REQUIREMENTS PER AIRPLANE
PARTS LIST PER ASSY.
PARTS
MODEL
NEXT ASSY.
REQ.
APPROVED
DATE
REPLACED BY
SUPPLIES & EQUIPMENT CLASSIFICATION
LET
ALTERATION
DATE
BY
TRACED TO DATE
T AN3-7A WAS AN73-10
E.O. 16547
V. 71K12271 WAS K11271
ON PBY-5 ONLY
W. ADDED -12, -13, AN442-D4
X. DIM. 6 3/8 WAS 2
(WT. CHG. NEG.)
AA -10-1/16x13/4x17 DUPRENE WAS -10
1/16x13/4x17 DUPRENE NO WT. CHG.
AB REMOVED
SCREWS TO BE S. STL. REPLAC.
SYMMETRICAL ABOUT ℄ EXCEPT AS NOTED
DRILL 1/8 DIA. HOLE AS SHOWN FROM PLATE ON DRAIN
1/8 NEOPRENE SHT.
AN442-D4
THIS STOP ON ST'BD. SIDE ONLY
THIS STOP ON PORT SIDE ONLY
37.375 D. REF.
SECT. F-F
RIVETS REF.
28B5158
AN442-D4
1/8 NEOPRENE SHT
DRILL 1/8 DIA. HOLE THRU ANCHOR BOX
ON L.H. SIDE ONLY DO NOT DRIVE THESE RIVETS UNTIL INST. OF ANCHOR BOX
DRAIN HOLES L.H. SIDE
SECT. H-H
SECT. G-G ST'BD. SIDE
SECT. I-I
SKIN
SECT. J-J
SECT. A-A
R.H. HEAT TREAT
THIS TUBE & ITS HOLES ON ST'BD. SIDE ONLY
TOP OF GUN TRACK TO DECK LINE
SECT. THRU STOP
TRACK
SECT. C-C
SECT. B-B
SECT. D-D
SECT. E-E
℄ GUN TRACK
STA. 0.55
STA. 0.66
STA. 1
RIVET TO SKIN
4-AN435 D8 BRAZIER HEAD ON OUTSIDE
FLUSH ON INSIDE OF TRACK
FINISH~ -2,-3,-4,-5,-6,-7
RIVETS MARKED ● ARE AN425-D6
RIVETS MARKED ● ARE AN425-D4
H 84